




# IC34-PANEL

## Wall & Roof Panel

Since 1992

Rolled Steel Products IC34-Panel is a combination of trapezoidal design and symmetry; and applied with exposed fasteners. This 26 gauge exposed fastener panel has 6.8" rib spacing, with 34" wall coverage & 27" roof coverage; IC34-Panel has unlimited uses. Suitable for use on walls or roof IC34-Panel is an ideal choice for residential, architectural, or commercial projects. If your plans call out for siding, IC34-Panel can be applied in a vertical or horizontal fashion. With IC34-Panel your vision is limitless. Available with the Tough Bond 3000™ SMP paint system with a 40 year written paint warranty, and Galvalume & Galvanized.

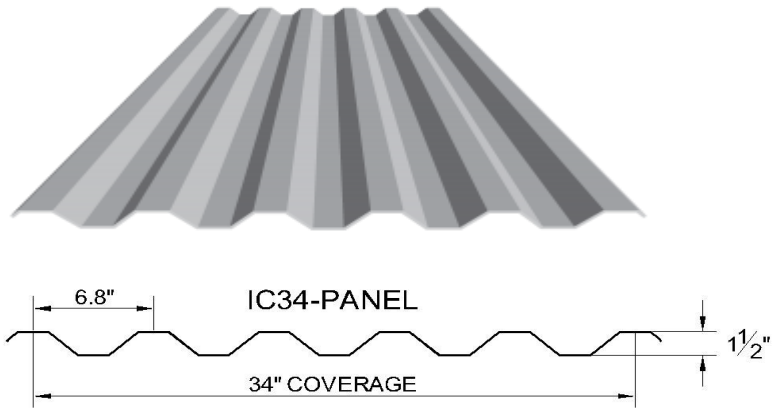

### IC34-Panel - Wall & Roof Panel

- Choose from Acrylic Coated Galvalume or Galvanized
- Available in a wide variety of Tough Bond™ 3000 colors
- Applies over solid sheeting or open framing
- 26 gauge stock / 24 gauge (non-stock, please inquire)
- Minimum roof slope 1:12
  - Special detail at ridge, eave & side-lap
- Coverage: 34" wall / 27" roof (net coverage)
- Major Rib Height: 1 1/2"
- Major Rib Spacing: 6.8" OC.
- Major Rib Configuration: Trapezoidal
- Fastening: Direct fastened
- Thickness: 26 GA, 24 GA Polar White only

IC34-Panel Rib Spacing 6.8" OC	ROOF LOAD - Inward Load - L/180 (psf)						
	4	5	6	7	8	9	10
26GA - Multi Span	121.8	80.5	57.2	44.9	32.5	23.8	17.0
24GA - Multi Span	187.8	122.8	86.1	63.5	42.4	29.4	21.2
	ROOF LOAD - Outward Load - L/60 (psf)						
	4	5	6	7	8	9	10
26GA - Multi Span	141.2	95.3	68.1	54.4	39.5	29.9	23.0
24GA - Multi Span	203.3	134.1	94.6	69.9	51.5	39.5	30.4

1010 North Nelson St. Spokane, WA 99202 Phone: (509) 535-8667 Toll Free: (800) 238-4057  
**WWW.GO-RSP.COM**

# ROLLED STEEL PRODUCTS, INC.

GENERAL

FEATURES & BENEFITS

LOAD TABLES

CONTACT